

6745 DIGITAL BABY SCALE



DETECTO model
6745 baby scale

DETECTO®

- 1 gram divisions
- 30 lb / 15 kg capacity
- Roomy 22 in x 9 in / 57 cm x 23 cm weighing tray (flat portion)
- Full-color, touchscreen 3.2 in (diagonal) display with 320 x 240 resolution
- Fun, colorful animal graphics attractive for children
- (6) C batteries (not included) or optional AC adapter
- Integral measuring tape (22 in / 56 cm long)
- Wide supportive scale base for infant safety
- 8-digit numeric patient ID for EMR/EHR
- Memory key to store and recall a weight
- Built-in carrying handles



NTEP Approved




Bluetooth™

Wi-Fi and Bluetooth 5.0 Connectivity



Units locking into lb or kg

6745 | DIGITAL BABY SCALE

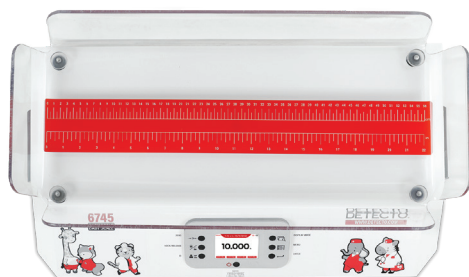

MEASURING TAPE

0-22 in / 0-56 cm length measuring tape imprinted underneath the clear thermoplastic platform, so will never wear off during use.

PATIENT ID				
12345678 Key in the numeric patient ID to be transmitted when the Print key is pressed.	1	2	3	
	4	5	6	
	7	8	9	
	SAVE	CANCEL	0	.
				DEL

PATIENT ID

The 6745's touchscreen graphics display allows you to enter up to an 8-digit numeric identification number for the patient, which can be sent to an EMR/EHR system.



CONNECTIVITY

Ports include 9-pin RS232 for sending data to a serial printer and USB-B for connecting with a PC for EMR/EHR, plus Wi-Fi and Bluetooth wireless connectivity is standard.

Capacity	6745: 0 - 10 lb x 0.002 lb / 10 - 30 lb x 0.005 lb 0 - 10 lb x 0.02 oz / 10 - 30 lb x 0.05 oz 0 - 5 kg x 0.001 kg / 5 - 15 kg x 0.002 kg 0 - 5,000 g x 1 g / 5,000 g - 15,000 g x 2 g	6745KG: 0 - 5 kg x 0.001 kg / 5 - 15 kg x 0.002 kg 0 - 5,000 g x 1 g / 5,000 g - 15,000 g x 2 g
Platform Size (Flat Portion)	22.5 in W x 9.1 in D / 57.1 cm W x 23.1 cm D	
Overall Dimensions	26 in W x 15.1 in D x 7.5 in H / 66 cm W x 38.4 cm D x 19.0 cm H	
Display Type	3.2 in / 81.3 mm (diagonal) full-color TFT display 320 x 240 resolution	
Touch Screen	Resistive touch panel covering the display	
Keys	Mechanical switch type, Power, Zero, Lock/Release, ID, Cycle Display Mode, Menu, Print	
Power Requirements	Six C-size Alkaline, Ni-Cad, or NiMH batteries (not included) Optional 100 to 240V AC 50/60Hz 12V DC 1.2A Medical wall plug-in UL, CSA, TUV, CE Approved AC power adapter (Cardinal part number 6800-1006) and Power Cord, 18GA, detachable IEC 320-C13, UL, CSA Approved, US plug (Cardinal part number 6980-1052)	
Operating Environment	Operated Temperature Range: 50 to 104°F (+10 to +40°C) Humidity: 0 to 90% non-condensing	
Communication Interfaces	Wi-Fi, Bluetooth 5.0, RS232, and USB-B	
Shipping Weight	35 lb / 15.8 kg	



StableSENSE adjustable filtering to compensate for baby movements

SOLD BY:

DETECTO®